

## Pushwire Junction Connector

For 2.5mm<sup>2</sup>

P01 series



- Comply to IEC/EN 60998-1, 60998-2-2
- For use in junction boxes, power-houses and compact electrical devices
- Dovetail for stacking, with test-slot
- Push insertion and twist release

### Specification

Housing : High-temperature Resistant

Thermoplastic 94-V2 grade




Metal Part : Plated Drass

Voltage / Ampere : 450V/20A

Temperature : -20°C to 100°C (working)

130°C (short-time)

Wiring Capacity : 0.75 - 2.5mm<sup>2</sup>

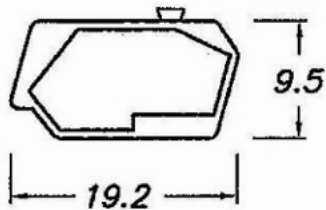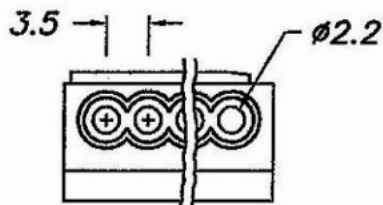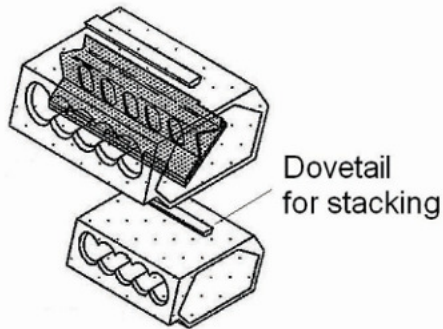


### Packing Details

5000 pcs per exp ctn.

### Product Code

P01- \_2/ \_ \_

No. of poles	choice of 2,3,4,5 or 8		colour code		
			2 - red	6 - blue	10 - transparent
			3 - orange	0 - black	
			5 - green	9 - white	