

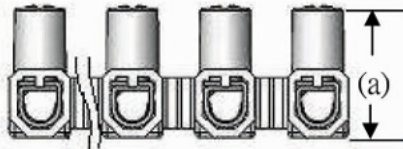
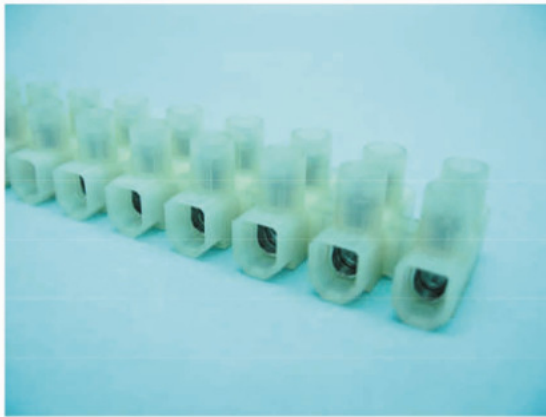


Terminal Block / Connector

for construction/DIY markets

T- S series

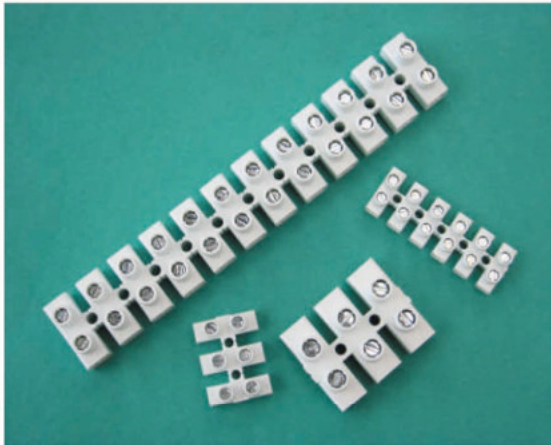

- Comply with IEC/EN60998-1,60998-2-1

- Colour : natural white

Specification

Housing : Polyamide 66 or Polypropylene

(94-V2 grade)

Metal Part : Steel Insert

Terminal Screw : Zinc-plated steel

	T04	T06	T10	T16	T25
Voltage (V)	450	450	450	750	750
Ampere (A)	VDE / IEC-rated 24 min. 3	32 5	57 15	76 30	101 60
Wiring Capacity up to (m	4.0	6.0	10.0	16.0	25.0

Ambient Temperature : T85-T110°C

Dimensions (mm)	T04	T06	T10	T16	T25
Height (a)	12.2	14.0	16.3	20.9	26.3
Length (b)	93.5	116.5	139.3	169.5	193.4
Width (c)	17.8	20.0	23.4	28.0	36.0
Spacing (d)	8.0	10.0	12.0	14.5	16.5

Packing Details (bulk packing)

T04	: 500 pcs per exp ctn	T16	: 200 pcs per exp ctn
T06	: 500 pcs per exp ctn	T25	: 100 pcs per exp ctn
T10	: 400 pcs per exp ctn		

Product Code

T	-	S/	(P: PP
04,06,10				A: PA66
16,25				
No. of poles			blank : for natural white	
			0 = black	